


d mm Wire diameter  
D mm Mean coil diameter  
Dd mm Diameter of mandrel  
De mm Outer coil diameter  
Dh mm Diameter of bush  
e1 mm Perm.dev. perpendicular line  
e2 mm Perm.dev. parallel line  
F1 N Prestressed spring force  
F2 N Loaded spring force

F<sub>n</sub> N Maximum force in static use  
F<sub>c</sub> N Theoretic maximum force at L<sub>c</sub>  
L0 mm Length of unstressed spring  
L1 mm Prestressed spring length  
L2 mm Loaded spring length  
L<sub>k</sub> mm Buckling length  
L<sub>n</sub> mm Minimum length in static use  
L<sub>c</sub> mm Block length  
n pc. Active coils

nt pc. Total coils  
R N/mm Spring rate  
S mm Pitch (distance between coils)  
s1 mm Prestressed spring deflection  
s2 mm Loaded spring deflection  
sh mm Maximum stroke in static use  
sn mm Maximum spring deflection in static use  
Weight g Weight of one spring in grammes  
F<sub>ndyn</sub> N Maximum force in dynamic force  
F<sub>ndtol</sub> N (+/-) tolerance of maximum dynamic force  
L<sub>ndyn</sub> mm Minimum length in dynamic use  
sh<sub>dyn</sub> mm Maximum stroke in dynamic use

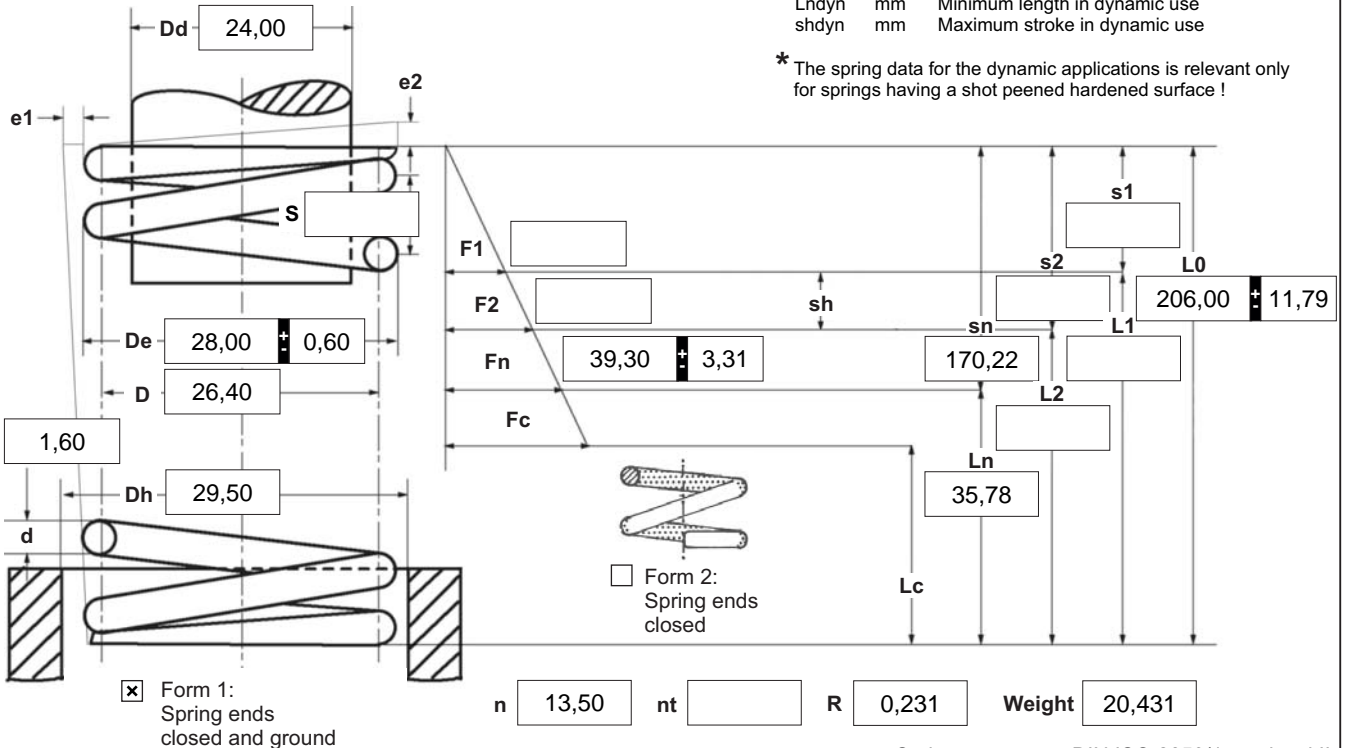

Spring test acc. to DIN ISO 2859/1 test level II

**1 Coiling direction**

☐ left ☒ right

**2 Dynamic load \***

F<sub>ndyn</sub> 33,36  
F<sub>ndtol</sub> 3,29  
L<sub>ndyn</sub> 61,50  
sh<sub>dyn</sub> 56,52

**3 Excursion sh**

mm

**4 Stress cyc. end. N**

mm

**5 Stress cycle frequ. n**

/

**6 Application temp.**

°C

**Remarks**

Country of origin: DE | Customs tariff number: 73202081

**7 Guidance and seat to DIN EN 13906-1**

☐ mandrel ☐ bush

Buckling length **L<sub>k</sub>** at

v=0,5 / Bild 5 162,19 mm

**8 Material**

EN 10270-3-1.4310

**9 Wire or rod surface**

☒ drawn ☐ rolled ☐ metal-cut

**10 Springs deburred** ☐ inside ☐ outside**11 Surface treatment** ☐ shot peened**12 Tolerances to DIN EN 15800**

Grade	De, Di, D	L0	F1, F2	e1, e2	Wire diameter d to DIN 2076
1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

**13 Production compensation through**

A spring resistance and associated length of tensed spring	L0	<input type="checkbox"/>
A spring resistance, associated length of tensed spring and L0	n, d	<input checked="" type="checkbox"/>
	n, De, Di	<input type="checkbox"/>
Two spring resistances and associated lengths of tensed spring	L0, n, d	<input type="checkbox"/>
	L0, n, De, Di	<input type="checkbox"/>

**14 Setting springs**

All springs which show setting tendency because of their size are pre-set within the production process.

**Prices**

Quantity scale	Single price [EUR]
1	5,4200 €
2	3,8200 €
3	3,6400 €
7	2,6600 €
17	1,3800 €
37	1,0200 €
75	0,8900 €
125	0,5823 €
175	0,5445 €
250	0,4945 €
350	0,4610 €
450	0,4169 €