


- α degree Unstressed leg position
- α_1 degree Prestressed rotational angle
- α_2 degree Loaded rotational angle
- α_h degree Excursion
- α_n degree Maximum rotational angle
- d mm Wire diameter
- D_{dmin} mm Min. possible mandrel diameter
- D_{dmax} mm Max. possible mandrel diameter
- D_e mm Outer coil diameter
- D_i mm Inner coil diameter
- F_1 N Prestressed spring force
- F_2 N Loaded spring force
- L_{k0} mm Length of spring body when relaxed
- LS mm Length of leg
- M_1 Nmm Prestressed torque
- M_2 Nmm Loaded torque
- M_n Nmm Maximum torque
- n pc. Active coils
- RH mm Distance power flow point from centre
- St mm Distance between coils (pitch)
- Weight g Weight of one spring in grammes

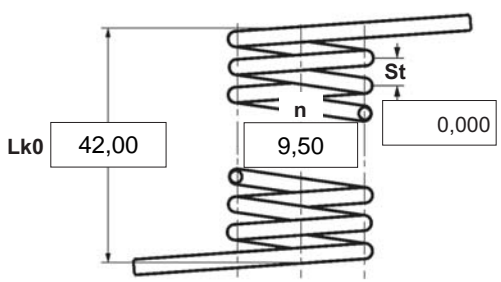


Spring test acc. to DIN ISO 2859/1 test level II

1 Coiling direction
 left right

5 Excursion α_h degr.

12 Tolerances to DIN 2194

Grade	D_i	L_{k0}	LSH,LSR	$\alpha, \alpha_1, \alpha_2$	M_1, M_2	Wire diameter d to DIN 2076
1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

2 Form of legs
 tangential, straight, no bends * 
 *We can also supply torsion springs with any form of leg for an extra charge.

6 Stress cyc. end. N

7 Stress cycle frequ. n /

8 Application temp. °C

9 Material
 EN 10270-3-1.4310

13 Production compensation through

A spring torque and the associated swing angle	α	<input checked="" type="checkbox"/>
A spring torque and the associated swing angle and α_0	n, d	<input type="checkbox"/>
	n, D_i	<input type="checkbox"/>
Two spring resistances and the associated swing angle	α, n, d	<input type="checkbox"/>
	α, n, D_i	<input type="checkbox"/>

3 Fixing
 Recumbent leg Lever leg

10 Wire or rod surface
 drawn rolled metal-cut

Prices

Quantità progressive	Prezzo singolo [EUR]
1	6,3100 €
2	4,4500 €
3	4,2400 €
7	3,4500 €
17	2,2200 €
37	1,7500 €
75	1,6000 €

4 Load
 in winding direction
 against winding direction

11 Surface treatment

Remarks
 Paese d'origine: DE | Numero della tariffa doganale: 73202089