


| | | | |
|-------|----------------------------------|--------|-------------------------------|
| d mm | Wire diameter | L1 mm | Prestressed spring length |
| D mm | Mean coil diameter | L2 mm | Loaded spring length |
| De mm | Outer coil diameter | Ln mm | Maximum spring length |
| Dh mm | Minimum diameter of bush | m mm | Loop opening width |
| F0 N | Initial tension | n pc. | Number of aktive coils |
| F1 N | Prestressed spring force | nt pc. | Total number of coils |
| F2 N | Loaded spring force | s1 mm | Prestressed spring deflection |
| Fn N | Maximum spring force | s2 mm | Loaded spring deflection |
| Lh mm | Loop height | sn mm | Maximum spring deflection |
| Lk mm | Lenght of unstressed spring body | sh mm | Excursion |
| L0 mm | Unstressed spring length | R N/mm | Spring rate |

Weight g Weight of one spring

*Loops are stocked without openings (m = 0,00). However it is possible to have an opening cut into the loop at an extra cost, without causing any delay.

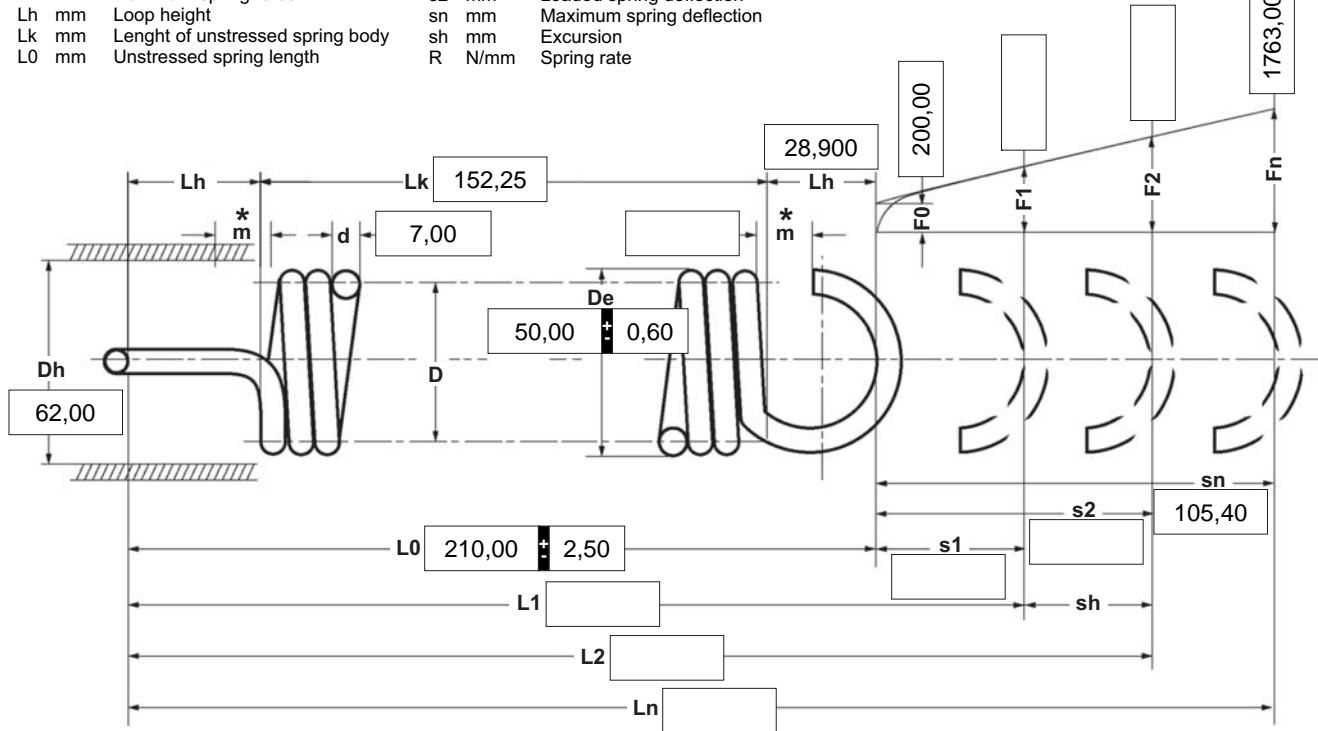

n nt R 14,830 Weight 924,923

Spring test acc. to DIN ISO 2859/1 test level II

| 1 Coiling direction <input type="checkbox"/> left <input checked="" type="checkbox"/> right | | 4 Stress cyc. end. N <input type="text"/> | | 10 Tolerances to DIN 2097 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|-------------------------------------|--|-------------------------------------|---|-------------------------------------|----------------|------------------------|----|-------|-------|-----------------------------|---|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|----|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-----|--------------------------|--------------------------|--------------------------|--------------------------|-------------------------------------|--|----------|
| 2 Loop shape and loop position Loop shape: 1/1 German loop Loops offset to one another by <input type="text"/> 270,0 <input type="text"/> 24,0 degrees (in the dir. of the right helix) | | 5 Stress cycle frequ. n <input type="text"/> / <input type="text"/> | | <table border="1"> <thead> <tr> <th>Grade</th> <th>De,Di,D</th> <th>L0</th> <th>F0-Fn</th> <th>Loops</th> <th>Wire diameter d to DIN 2076</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><input type="checkbox"/></td> <td><input type="checkbox"/></td> <td><input type="checkbox"/></td> <td><input type="checkbox"/></td> <td><input type="checkbox"/></td> </tr> <tr> <td>2</td> <td><input checked="" type="checkbox"/></td> <td><input checked="" type="checkbox"/></td> <td><input checked="" type="checkbox"/></td> <td><input checked="" type="checkbox"/></td> <td><input checked="" type="checkbox"/></td> </tr> <tr> <td>3</td> <td><input type="checkbox"/></td> <td><input type="checkbox"/></td> <td><input type="checkbox"/></td> <td><input type="checkbox"/></td> <td><input checked="" type="checkbox"/></td> </tr> </tbody> </table> | | Grade | De,Di,D | L0 | F0-Fn | Loops | Wire diameter d to DIN 2076 | 1 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | 2 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | 3 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | | |
| Grade | De,Di,D | L0 | F0-Fn | Loops | Wire diameter d to DIN 2076 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 Excursion sh <input type="text"/> mm | | 6 Application temp. <input type="text"/> °C | | 11 Production compensation through | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 Material EN 10270-1 | | 8 Wire or rod surface <input checked="" type="checkbox"/> drawn <input type="checkbox"/> rolled <input type="checkbox"/> metal-cut | | A spring resistance, associated length of tensed spring and L0: F0, D <input checked="" type="checkbox"/> A spring resistance, associated length of tensed spring and F0: L0, n, d <input type="checkbox"/> L0, D <input type="checkbox"/> Two spring resistances and associated length of tensed spring: L0, n, d <input type="checkbox"/> F0, D <input type="checkbox"/> | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 Surface treatment <input type="text"/> | | Prices | | <table border="1"> <thead> <tr> <th>Grupa ilociowa</th> <th>Cena jednostkowa [EUR]</th> </tr> </thead> <tbody> <tr><td>1</td><td></td></tr> <tr><td>2</td><td>18,8000 €</td></tr> <tr><td>3</td><td>14,9700 €</td></tr> <tr><td>7</td><td>11,4700 €</td></tr> <tr><td>17</td><td>9,9300 €</td></tr> <tr><td>37</td><td>8,7700 €</td></tr> <tr><td>75</td><td>7,3800 €</td></tr> <tr><td>125</td><td>7,2700 €</td></tr> <tr><td>175</td><td>7,3137 €</td></tr> <tr><td>250</td><td>7,2307 €</td></tr> <tr><td>350</td><td>6,9982 €</td></tr> <tr><td></td><td>6,7990 €</td></tr> </tbody> </table> | | Grupa ilociowa | Cena jednostkowa [EUR] | 1 | | 2 | 18,8000 € | 3 | 14,9700 € | 7 | 11,4700 € | 17 | 9,9300 € | 37 | 8,7700 € | 75 | 7,3800 € | 125 | 7,2700 € | 175 | 7,3137 € | 250 | 7,2307 € | 350 | 6,9982 € | | 6,7990 € |
| Grupa ilociowa | Cena jednostkowa [EUR] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 18,8000 € | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 14,9700 € | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | 11,4700 € | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 17 | 9,9300 € | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 37 | 8,7700 € | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 75 | 7,3800 € | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 125 | 7,2700 € | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 175 | 7,3137 € | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 250 | 7,2307 € | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 350 | 6,9982 € | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 6,7990 € | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Remarks
 Kraj pochodzenia: DE | Numer taryfy celnej: 73202085