


d mm Wire diameter  
D mm Mean coil diameter  
Dd mm Diameter of mandrel  
De mm Outer coil diameter  
Dh mm Diameter of bush  
e1 mm Perm.dev. perpendicular line  
e2 mm Perm.dev. parallel line  
F1 N Prestressed spring force  
F2 N Loaded spring force

F<sub>n</sub> N Maximum force in static use  
F<sub>c</sub> N Theoretic maximum force at L<sub>c</sub>  
L0 mm Length of unstressed spring  
L1 mm Prestressed spring length  
L2 mm Loaded spring length  
L<sub>k</sub> mm Buckling length  
L<sub>n</sub> mm Minimum length in static use  
L<sub>c</sub> mm Block length  
n pc. Active coils

nt pc. Total coils  
R N/mm Spring rate  
S mm Pitch (distance between coils)  
s1 mm Prestressed spring deflection  
s2 mm Loaded spring deflection  
sh mm Maximum stroke in static use  
sn mm Maximum spring deflection in static use  
Weight g Weight of one spring in grammes

F<sub>ndyn</sub> N Maximum force in dynamic force  
F<sub>ndtol</sub> N (+/-) tolerance of maximum dynamic force  
L<sub>ndyn</sub> mm Minimum length in dynamic use  
sh<sub>dyn</sub> mm Maximum stroke in dynamic use

\* The spring data for the dynamic applications is relevant only for springs having a shot peened hardened surface !

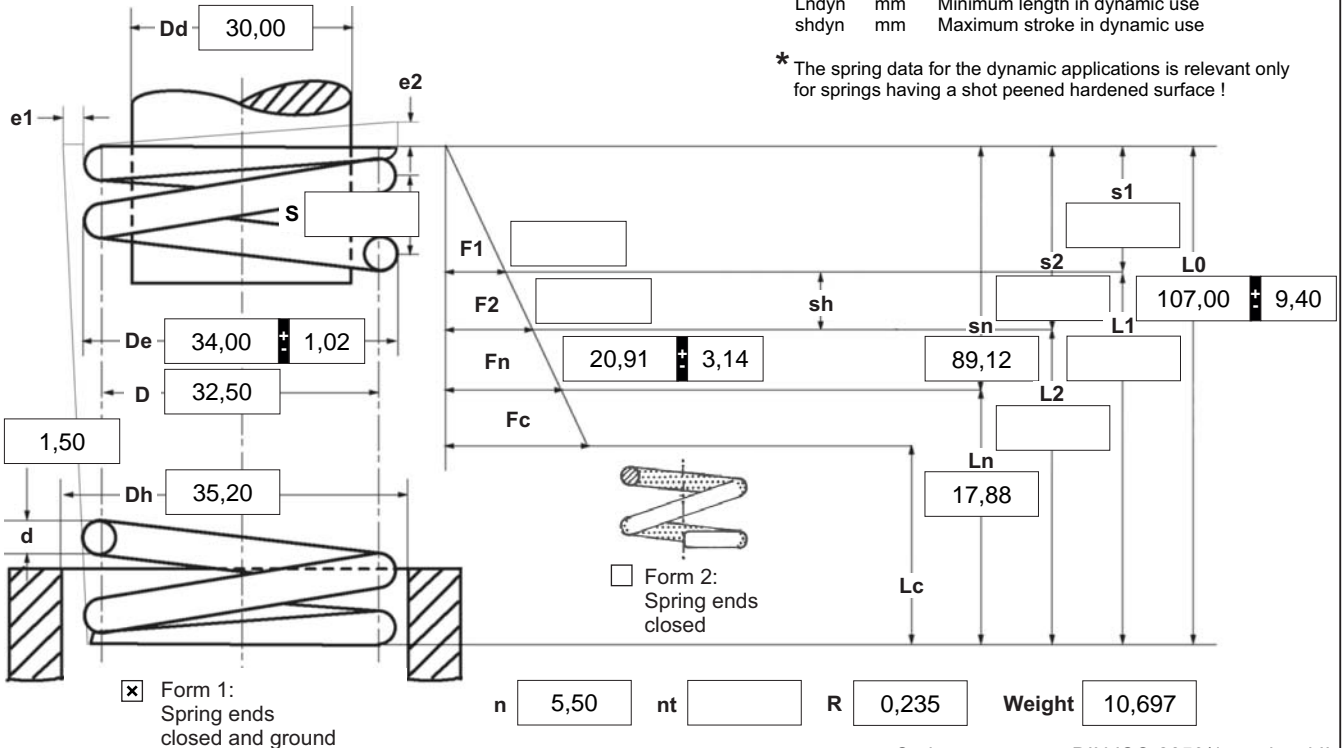

Spring test acc. to DIN ISO 2859/1 test level II

# 1 Coiling direction

☐ left ☒ right

# 2 Dynamic load \*

F<sub>ndyn</sub> 20,13

F<sub>ndtol</sub> 3,02

L<sub>ndyn</sub> 21,20

sh<sub>dyn</sub> 53,61

3 Excursion sh mm

4 Stress cyc. end. N

5 Stress cycle frequ. n /

6 Application temp. °C

# Remarks

Származási ország: DE | Vámtarifaszám: 73202081

# 7 Guidance and seat to DIN EN 13906-1

☐ mandrel ☐ bush

Buckling length L<sub>k</sub> at

v=0,5 / Bild 5 0,00 mm

# 8 Material

EN 10270-3-1.4310

# 9 Wire or rod surface

☒ drawn ☐ rolled ☐ metal-cut

10 Springs deburred ☐ inside ☐ outside

11 Surface treatment ☐ shot peened

# 12 Tolerances to DIN EN 15800

Grade	De,Di,D	L0	F1,F2	e1,e2	Wire diameter d to DIN 2076
1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

# 13 Production compensation through

A spring resistance and associated length of tensed spring	L0	<input type="checkbox"/>
A spring resistance, associated length of tensed spring and L0	n, d	<input checked="" type="checkbox"/>
	n, De, Di	<input type="checkbox"/>
Two spring resistances and associated lengths of tensed spring	L0, n, d	<input type="checkbox"/>
	L0,n,De,Di	<input type="checkbox"/>

# 14 Setting springs

All springs which show setting tendency because of their size are pre-set within the production process.

# Prices

Mennyiségi lépcső	Egységár (EUR)
1	5,2700 €
2	3,7200 €
3	3,5400 €
7	2,5100 €
17	1,2200 €
37	0,9000 €
75	0,7300 €
125	0,5070 €
175	0,4444 €
250	0,4132 €
350	0,3853 €
450	0,3536 €