


- α degree Unstressed leg position
- α_1 degree Prestressed rotational angle
- α_2 degree Loaded rotational angle
- α_h degree Excursion
- α_n degree Maximum rotational angle
- d mm Wire diameter
- D_{dmin} mm Min. possible mandrel diameter
- D_{dmax} mm Max. possible mandrel diameter
- D_e mm Outer coil diameter
- D_i mm Inner coil diameter
- F_1 N Prestressed spring force
- F_2 N Loaded spring force
- Lk_0 mm Length of spring body when relaxed
- LS mm Length of leg
- M_1 Nmm Prestressed torque
- M_2 Nmm Loaded torque
- M_n Nmm Maximum torque
- n pc. Active coils
- RH mm Distance power flow point from centre
- St mm Distance between coils (pitch)
- Weight g Weight of one spring in grammes

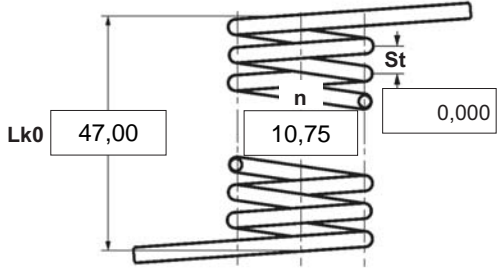

Spring test acc. to DIN ISO 2859/1 test level II

1 Coiling direction <input checked="" type="checkbox"/> left <input type="checkbox"/> right	5 Excursion α_h <input type="text"/> degr.
2 Form of legs tangential, straight, no bends * *We can also supply torsion springs with any form of leg for an extra charge.	6 Stress cyc. end. N <input type="text"/>
3 Fixing Recumbent leg <input type="checkbox"/> Lever leg <input type="checkbox"/>	7 Stress cycle frequ. n <input type="text"/> /
4 Load <input type="checkbox"/> in winding direction <input type="checkbox"/> against winding direction	8 Application temp. <input type="text"/> °C
Remarks Kraj pochodzenia: DE Numer taryfy celnej: 73202089	9 Material EN 10270-3-1.4310
10 Wire or rod surface <input checked="" type="checkbox"/> drawn <input type="checkbox"/> rolled <input type="checkbox"/> metal-cut	11 Surface treatment <input type="text"/>

12 Tolerances to DIN 2194								
Grade	D_i	Lk_0	LSH,LSR	$\alpha, \alpha_1, \alpha_2$	M_1, M_2	Wire diameter d to DIN 2076		
1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		

13 Production compensation through	
A spring torque and the associated swing angle	α <input checked="" type="checkbox"/>
A spring torque and the associated swing angle and α_0	n, d <input type="checkbox"/>
	n, D_i <input type="checkbox"/>
Two spring resistances and the associated swing angle	α, n, d <input type="checkbox"/>
	α, n, D_i <input type="checkbox"/>

Prices	
Grupa ilociowa	Cena jednostkowa [EUR]
1	
2	6,3100 €
3	4,4500 €
7	4,2400 €
17	3,4500 €
37	2,2200 €
75	1,7500 €
	1,6000 €