


d mm	Wire diameter	L1 mm	Prestressed spring length
D mm	Mean coil diameter	L2 mm	Loaded spring length
De mm	Outer coil diameter	Ln mm	Maximum spring length
Dh mm	Minimum diameter of bush	m mm	Loop opening width
F0 N	Initial tension	n pc.	Number of active coils
F1 N	Prestressed spring force	nt pc.	Total number of coils
F2 N	Loaded spring force	s1 mm	Prestressed spring deflection
Fn N	Maximum spring force	s2 mm	Loaded spring deflection
Lh mm	Loop height	sn mm	Maximum spring deflection
Lk mm	Length of unstressed spring body	sh mm	Excursion
L0 mm	Unstressed spring length	R N/mm	Spring rate

Weight g Weight of one spring

\*Loops are stocked without openings (m = 0,00). However it is possible to have an opening cut into the loop at an extra cost, without causing any delay.

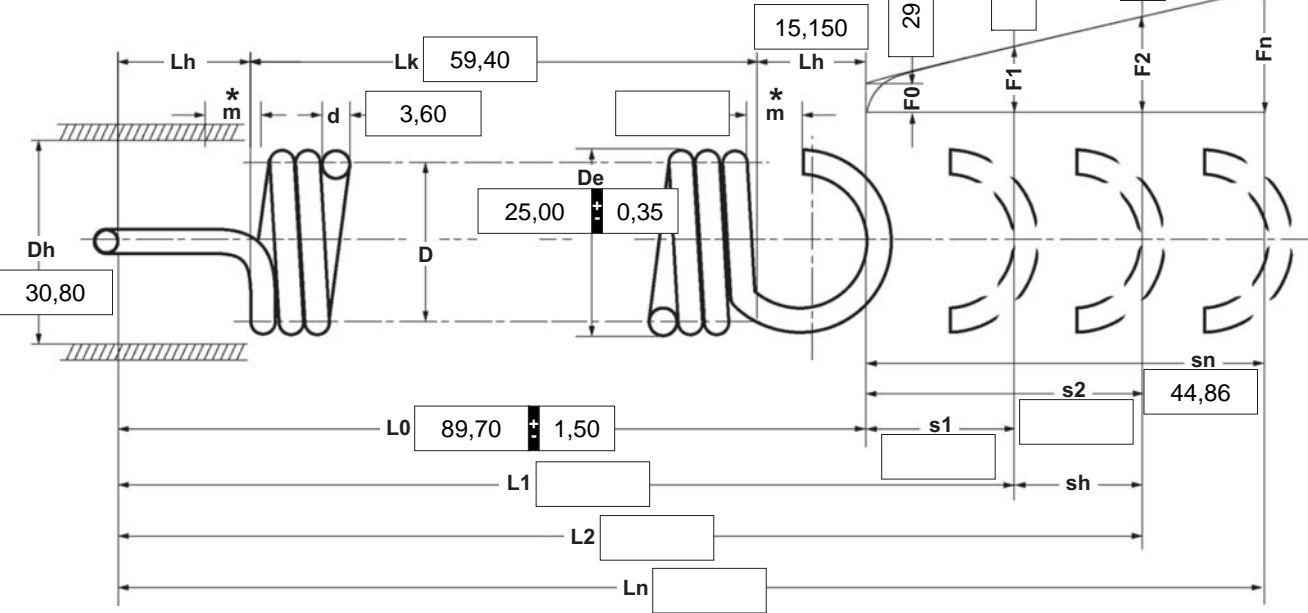

n  nt  R 9,675 Weight 93,340

Spring test acc. to DIN ISO 2859/1 test level II

<b>1 Coiling direction</b> <input type="checkbox"/> left <input checked="" type="checkbox"/> right		<b>4 Stress cyc. end. N</b> <input type="text"/>		<b>10 Tolerances to DIN 2097</b>																									
<b>2 Loop shape and loop position</b> Loop shape: <input type="text" value="1/1 German loop"/>		<b>5 Stress cycle frequ. n</b> <input type="text"/> / <input type="text"/>		<table border="1"> <thead> <tr> <th>Grade</th> <th>De,Di,D</th> <th>L0</th> <th>F0-Fn</th> <th>Loops</th> <th>Wire diameter d to DIN 2076</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><input type="checkbox"/></td> <td><input type="checkbox"/></td> <td><input type="checkbox"/></td> <td><input type="checkbox"/></td> <td><input type="checkbox"/></td> </tr> <tr> <td>2</td> <td><input checked="" type="checkbox"/></td> <td><input checked="" type="checkbox"/></td> <td><input checked="" type="checkbox"/></td> <td><input checked="" type="checkbox"/></td> <td><input checked="" type="checkbox"/></td> </tr> <tr> <td>3</td> <td><input type="checkbox"/></td> <td><input type="checkbox"/></td> <td><input type="checkbox"/></td> <td><input type="checkbox"/></td> <td><input checked="" type="checkbox"/></td> </tr> </tbody> </table>		Grade	De,Di,D	L0	F0-Fn	Loops	Wire diameter d to DIN 2076	1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Grade	De,Di,D	L0	F0-Fn	Loops	Wire diameter d to DIN 2076																								
1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>																								
2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>																								
3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>																								
Loops offset to one another by <input type="text" value="180,0"/> $\pm$ <input type="text" value="22,0"/> degrees (in the dir. of the right helix)		<b>6 Application temp.</b> <input type="text"/> °C		<b>11 Production compensation through</b>																									
<b>3 Excursion sh</b> <input type="text"/> mm		<b>7 Material</b> <input type="text" value="EN 10270-3-1.4310"/>		A spring resistance, associated length of tensed spring and L0: F0, D <input checked="" type="checkbox"/>																									
<b>Remarks</b> País de origem: DE   Número de tarifa alfandegária: 73202085		<b>8 Wire or rod surface</b> <input checked="" type="checkbox"/> drawn <input type="checkbox"/> rolled <input type="checkbox"/> metal-cut		A spring resistance, associated length of tensed spring and F0: L0, n, d <input type="checkbox"/> L0, D <input type="checkbox"/>																									
		<b>9 Surface treatment</b> <input type="text"/>		Two spring resistances and associated length of tensed spring: L0, n, d <input type="checkbox"/> F0, D <input type="checkbox"/>																									
				<b>Prices</b>																									
				<table border="0"> <tr> <td>Desconto por quantidade</td> <td>Preço individual [EUR]</td> </tr> <tr> <td>1</td> <td>13,1800 €</td> </tr> <tr> <td>2</td> <td>10,5000 €</td> </tr> <tr> <td>3</td> <td>6,0600 €</td> </tr> <tr> <td>7</td> <td>3,9100 €</td> </tr> <tr> <td>17</td> <td>3,9100 €</td> </tr> <tr> <td>37</td> <td>3,9100 €</td> </tr> <tr> <td>75</td> <td>3,9100 €</td> </tr> <tr> <td>125</td> <td>3,9100 €</td> </tr> <tr> <td>175</td> <td>3,9100 €</td> </tr> <tr> <td>250</td> <td>3,9100 €</td> </tr> <tr> <td>350</td> <td>3,9100 €</td> </tr> </table>		Desconto por quantidade	Preço individual [EUR]	1	13,1800 €	2	10,5000 €	3	6,0600 €	7	3,9100 €	17	3,9100 €	37	3,9100 €	75	3,9100 €	125	3,9100 €	175	3,9100 €	250	3,9100 €	350	3,9100 €
Desconto por quantidade	Preço individual [EUR]																												
1	13,1800 €																												
2	10,5000 €																												
3	6,0600 €																												
7	3,9100 €																												
17	3,9100 €																												
37	3,9100 €																												
75	3,9100 €																												
125	3,9100 €																												
175	3,9100 €																												
250	3,9100 €																												
350	3,9100 €																												